

MIL-C-26482 II Series Connectors

Brief Introduction

- According to the structure of MIL-C-26482 II series
- Quick bayonet coupling, rear-removable crimp contact
- Medium contact density,
- Mating hermetic and RFI shielding
- Widely used in military system and commercial fields



Technical Performance

Shell	Aluminum alloy, copper-alloy or stainless steel
Operating Temperature Range	Class W: -55 °C ~ +175 °C Class L, A, S: -55 °C ~ +200 °C
Random vibration	Frequency 10 Hz ~ 2000 Hz at 196 m/s ²
Shock	Max acceleration 294 m/s ²
Durability	≥ 500 mating cycles MS3475 ≥ 250 mating cycles
Anti-RFI	At frequency 100 ~ 1000 MHz, leakage attenuation: 65~45dB.
Corrosion resistance	Class A withstand 48 hours salt spray Class L withstand 96 hours salt spray Class W withstand 500 hours salt spray Class S withstand 1000 hours salt spray

Contact No.	Pitch (mm)	Area of cable (mm ²)	Resistance (mΩ)	Current (A)
20 #	1.00	0.20	≤ 5	3.0
		0.30		5.0
		0.50		7.5
16 #	1.59	0.50	≤ 3	7.5
		0.80		10.0
		1.25		13.0
12 #	2.39	2.00	≤ 2	17.0
		3.15		23.0

How To Order

MS 3474 W 18-06 P N
① ② ③ ④ ⑤ ⑥ ⑦

①MS—Series Prefix

②Type: 3470-Narrow flange receptacle

3471-Cable connecting receptacle

3472-Wide flange receptacle

3474-Jam nut receptacle

3475-RFI shielding plug

3476-Straight plug

③Finish:A = Black anodized

L = Electroless nickel plating

W = Olive drab cadmium plating

S = Stainless steel passivated

B = Olive green cadmium plating

④Shell size :08-10-12-14-16-18-20-22-24

⑤Insert arrangement: Please see the figure of insert arrangement

⑥Contact :P-pin contact


S-socket contact

PL-PCB pin

SL-PCB socket


⑦Key: N、W、X、Y、Z

Contact Arrangements




0833

3-20#




0804

4-20#




0898

3-20#




1006

6-20#




1098

6-20#




1210

10-20#




1203

3-16#




1208

8-20#




1419

19-20#




1415

14-20#




1412

8-20#
4-16#




1405

5-16#




1404

4-12#




1626

26-20#




1623

22-20#
1-16#




1608


8-16#




1832
32-20#




1811
11-16#




1808
8-12#




2041
41-20#




2039
37-20#
2-16#




2016
16-16#




2255
55-20#




2212
12-12#




2232
32-20#




2241
27-20#
14-16#




2221
21-16#




2295
26-20#
6-12#



2461
61-20#




2431
31-16#



2419
19-12#


Product Outline Dimensions

Straight plug (MS3475/MS3476)

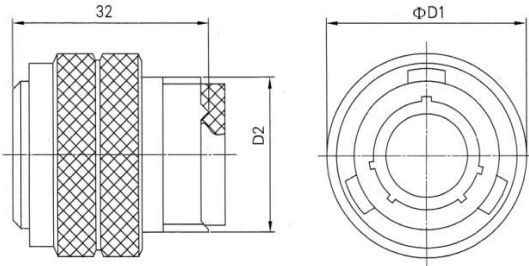


Shell No.	D1	D2
08	19.7	0.5000-20
10	23.5	0.6250-24
12	27.0	0.7500-20
14	30.5	0.8750-20
16	34.0	1.0000-20
18	35.3	1.0625-18
20	39.3	1.1875-18
22	43.0	1.3125-18
24	46.0	1.4375-18

Jam nut receptacle (MS3474/MS3479)

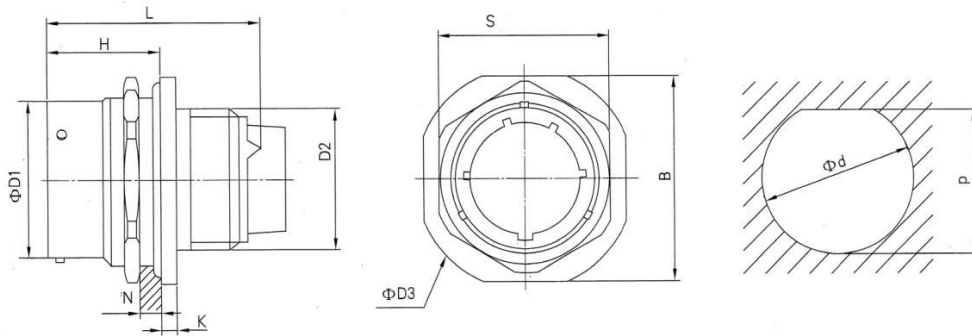


Shell No.	D1	D2	D3	L	H	K	B	S	N	d	p
08	12.0	0.5000-20	27.2	31.5	17.5	2.5	24.0	19.4	4.8	14.6	13.7
10	15.0	0.6250-24	30.4	31.5	17.5	2.5	27.0	22.6	4.8	17.8	16.9
12	19.1	0.7500-20	35.2	31.5	17.5	2.5	32.0	27.4	4.8	22.8	21.0
14	22.2	0.8750-20	38.3	31.5	17.5	2.5	35.0	30.2	4.8	25.7	24.1
16	25.4	1.0000-20	41.5	31.5	17.5	2.5	38.2	33.7	4.8	28.4	27.3
18	28.6	1.0625-18	44.7	31.5	17.5	2.5	41.5	36.9	4.8	32.1	30.5
20	31.8	1.1875-18	49.4	33.1	19.0	3.3	46.2	40.1	6.4	35.2	33.7
22	34.9	1.3125-18	52.6	33.1	19.0	3.3	49.4	43.3	6.4	38.4	36.8
24	38.1	1.4375-18	55.8	33.1	19.0	3.3	52.6	46.4	5.6	41.6	40.1

Narrow flange receptacle (MS3470)

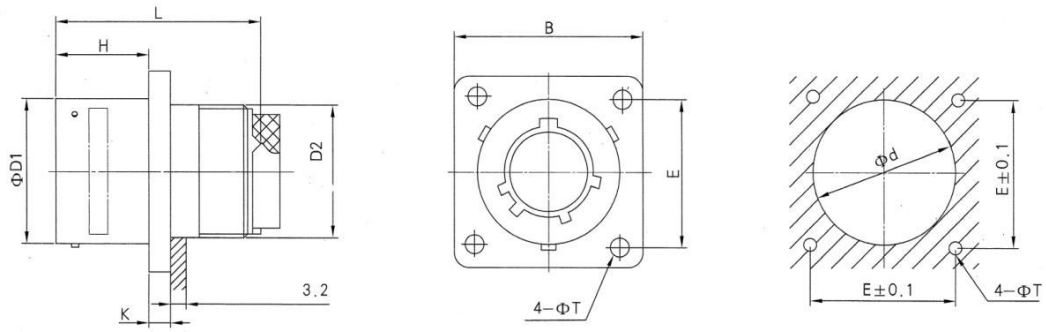


Shell No.	D1	D2	L	H	K	B	E	T	d
08	12.0	0.5000-20	32.0	11.7	1.8	21.0	15.1	3.2	14.4
10	15.0	0.6250-24	32.0	11.7	1.8	24.2	18.3	3.2	17.3
12	19.1	0.7500-20	32.0	11.7	1.8	26.5	20.6	3.2	21.9
14	22.2	0.8750-20	32.0	11.7	1.8	28.7	23.0	3.2	25.1
16	25.4	1.0000-20	32.0	11.7	1.8	31.2	24.6	3.2	28.2
18	28.6	1.0625-18	32.0	11.7	1.8	33.7	27.0	3.2	31.4
20	31.8	1.1875-18	33.5	14.3	2.7	36.9	29.4	3.2	34.6
22	34.9	1.3125-18	33.5	14.3	2.7	40.0	31.8	3.2	37.7
24	38.1	1.4375-18	33.5	15.2	2.7	43.3	34.9	3.7	41.0

Flange receptacle for PCB

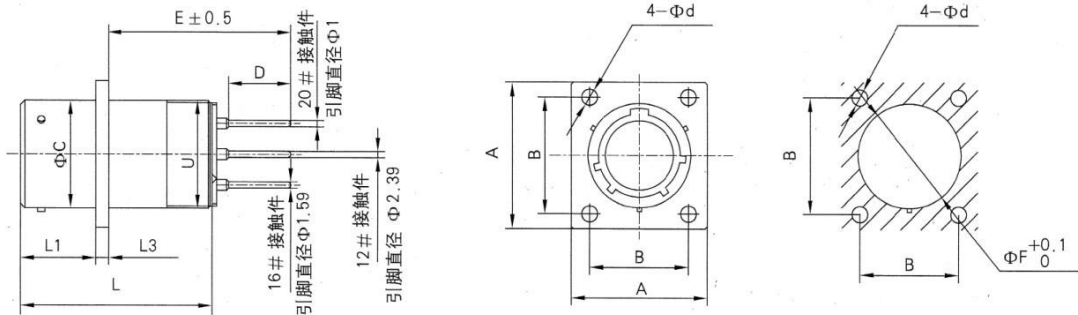

Shell No.	A	B	d	F	C	D	E	L1	L3	L	U(UNEF-2A)
8	21.0	15.1	3.2	14.4	12.0	7.5	28	11.7	1.9	30.85	0.5000-20
10	24.2	18.3	3.2	17.3	15.0	7.5	28	11.7	1.9	30.85	0.6250-24
12	26.5	20.6	3.2	21.9	19.1	7.5	28	11.7	1.9	30.85	0.7500-20
14	28.9	23.0	3.2	25.1	22.2	7.5	28	11.7	1.9	30.85	0.8750-20
16	31.3	24.6	3.2	28.2	25.4	7.5	28	11.7	1.9	30.85	1.0000-20
18	33.7	27.1	3.2	31.4	28.6	7.5	28	11.7	1.9	30.85	1.0625-18
20	36.9	29.4	3.2	34.6	31.8	9.5	28	14.3	2.7	32.40	1.1875-18
22	40.0	31.8	3.2	37.7	34.9	9.5	28	14.3	2.7	32.40	1.3125-18
24	43.3	34.9	3.7	41.0	38.1	11.6	28	15.2	2.7	32.40	1.4375-18

Jam nut receptacle for PCB

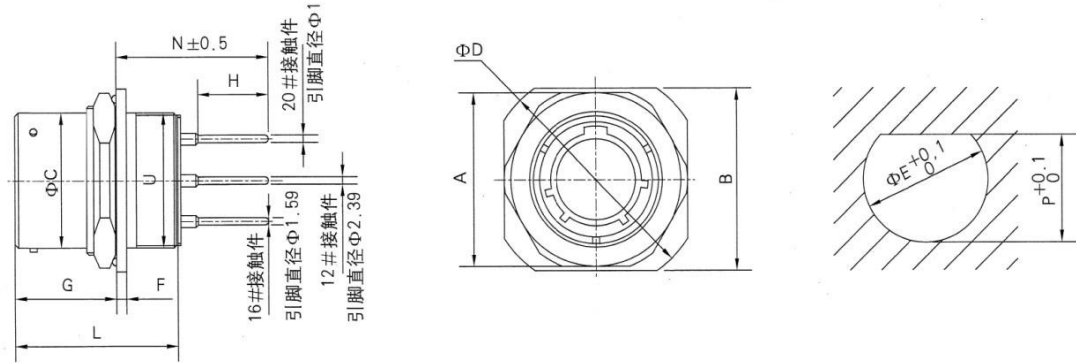

Shell No.	A	B	C	D	E	F	G	H	N	L	P	U (UNEF-2A)
8	19.4	24.0	12.0	27.2	14.4	2.87	17.8	7.5	23.5	30.6	13.3	0.5000-20
10	22.6	27.0	15.0	30.4	17.3	2.87	17.8	7.5	23.5	30.6	16.6	0.6250-24
12	27.4	32.0	19.1	35.2	21.9	2.87	17.8	7.5	23.5	30.6	21.3	0.7500-20
14	30.6	35.0	22.2	38.3	25.1	2.87	17.8	7.5	23.5	30.6	24.3	0.8750-20
16	33.7	38.2	25.4	41.4	28.2	2.87	17.8	7.5	23.5	30.6	27.5	1.0000-20
18	36.9	41.5	28.6	44.6	31.4	2.87	17.8	7.5	23.5	30.6	30.5	1.0625-18
20	40.1	46.2	31.8	49.4	34.6	3.76	19.5	7.8	23.5	32.0	33.8	1.1875-18
22	43.3	49.2	34.9	52.6	37.7	3.76	19.5	7.8	23.5	32.0	36.7	1.3125-18
24	46.4	52.5	38.1	55.7	41.0	3.76	19.5	7.8	23.5	32.0	40.3	1.4375-18